



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Andrew Gersey*

Dated 26 September 2003

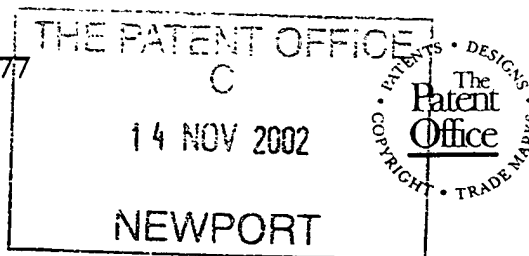

14NOV02 E763437-1 000370  
F01/7700 0.00-0226559.3

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

DY3041

2. Patent application number

(The Patent Office will fill in this part)

0226559.3

14 NOV 2002

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

ROLLS-ROYCE PLC  
65 BUCKINGHAM GATE  
LONDON  
SW1E 6AT

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

397002

4. Title of the invention

INVESTMENT MOULDING PROCESS AND APPARATUS

5. Name of your agent (*if you have one*)

M A GUNN

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

ROLLS-ROYCE plc  
PATENTS DEPARTMENT  
PO BOX 31  
DERBY  
DE24 8BJ

Patents ADP number (*if you know it*)

3962001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 4

Abstract 1

Drawing(s) 4 + 4 RM

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3 ✓


Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 1 ✓

Any other documents (please specify)

DEPOSIT ACCOUNT FEE SHEET ✓

11. I/We request the grant of a patent on the basis of this application

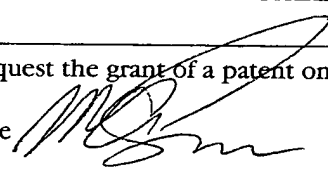Signature  Date 13.11.2000

M A GUNN

12. Name and daytime telephone number of person to contact in the United Kingdom K A WHITE 01332 24945

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 50050.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

14 NOV 2002



**Statement of inventorship and of right to grant of a patent**

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

14 NOV 2002

1. Your reference

DY3041

2. Patent application number  
(if you know it)

0226559.3

3. Full name of the or of each applicant

ROLLS-ROYCE PLC

4. Title of the invention

INVESTMENT MOULDING PROCESS AND APPARATUS

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

BY VIRTUE OF SECTION 39(1)(a) OF THE PATENTS ACT 1977

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))

2

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

Date

8. Name and daytime telephone number of  
person to contact in the United Kingdom

M A GUNN

13.11.2002

K A WHITE

01332 249451

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

JAGNANDAN KUMAR BHANGU  
7 CENTRAL AVENUE  
BORROWASH  
DERBY  
DE72 3JZ

Patents ADP number (if you know it):

2097251002

JOHN WILLIAM HARRISON  
BROOMHILLS  
CALKE ROAD  
MELBOURNE  
DERBY  
DE73 1DL

Patents ADP number (if you know it):

8505844001


Reminder

Have you signed the form?

Patents ADP number (if you know it):

ROLLS-ROYCE plc

CASE NO: DY3041

RR TITLE: 

APPLICATION NO:

DATED: 14 NOVEMBER 2002

FIRST APPLICATION

DRAFTED BY: S&P FOR KAW

PATENTS ACT 1977

SPECIFICATION

INVESTMENT MOULDING PROCESS AND APPARATUS

## Investment Moulding Process and Apparatus

This invention relates to investment moulding process  
5 and apparatus. Particularly, but not exclusively, the  
invention relates to investment moulding methods and  
apparatus for manufacturing aerofoil blades, for example  
turbine blades.

In the gas turbine industry, turbine blades need to be  
10 manufactured with cooling passages for the flow of cooling  
air therethrough. Generally, turbine blades are  
manufactured by an investment moulding process in which the  
blades are formed from a single crystal of the material.

The investment moulding process involves the use of a  
15 master mould to provide a wax precursor of the turbine  
blade. The wax precursor is covered with a ceramic  
material by being dipped in a slurry of the ceramic  
material which sets to form an investment mould. The  
investment mould is then heated to melt the wax which flows  
20 away. Finally, the molten metallic alloy material to form  
the turbine blade is poured into the ceramic investment  
mould, and the alloy material allowed to cool and solidify.  
The ceramic material is then dissolved using a suitable  
acid.

25 In order to form the passages in the blade, the master  
mould is initially provided with a ceramic core which  
corresponds to the shape of the cooling passage, around  
which the wax is poured. In order to ensure that the  
ceramic core is held in place when the wax is melted away,  
30 pins formed of a platinum material (called p-pins) are  
inserted through the wax precursor so that their ends  
engage the core. Generally, the pins are inserted in pairs  
opposite to each other to ensure that the core is held  
securely in place.

35 In order to ensure that the pins are located securely,  
the pins project from the wax, and a pyramidal wax

formation is provided on the precursor around each p-pin.

According to one aspect of this invention, there is provided a master mould for forming a precursor casting of a cast member in an investment moulding process, the master  
5 mould having an internal surface defining a space in which precursor casting can be formed, and the surface further defining a location indentation to provide a location projection on the precursor casting into which a holding member can be inserted to hold an internal member in the  
10 precursor casting.

The preferred embodiment is particularly suitable for use in investment moulding processes for forming cast members having a channel or passage therethrough. An example of such a cast member is an aerofoil member such as  
15 a turbine or compressor blade of a gas turbine engine, where the channel is a conduit for the passage of gas therethrough, for example for cooling the aerofoil member. In such embodiments, the air channel can be provided in the aerofoil member by the use of a core member in the  
20 investment casting process.

The precursor casting may be formed of a suitable first removable material for example a meltable material such as wax. The internal member may be formed of a suitable second removable material, which may be  
25 dissolvable, such as a ceramic material.

Preferably, the location indentation has a first dimension transverse to said surface, and has a second dimension generally parallel to said surface, the first dimension being less than the second dimension. This has  
30 the advantage in the preferred embodiment of spreading out strain in the material forming the cast member, thereby reducing the tendency of said material to re-crystallise in the region of the location projection during the final stage of the investment casting process.

35 Desirably, the first dimension is in the range of 0.2mm to 5mm, and preferably, in the range of 0.3mm to 1mm.

More preferably the first dimension is substantially 0.4mm.

Desirably, the second dimension is in the range of 1mm to 30mm, and preferably, in the range of 2mm to 10mm. Most preferably, the second dimension is substantially 3mm.

5 In one embodiment, the location indentation is generally circular. In another embodiment, the location indentation may have a generally aerodynamic configuration.

Preferably, the master mould defines a plurality of said location indentations, which may be arranged in pairs.  
10 The indentations of each respective pair may be arranged generally opposite each other.

According to another aspect of this invention, there is provided a precursor casting of a cast member to be formed during an investment moulding process, the precursor  
15 casting having the configuration of the cast member, the precursor casting comprising a main body and an internal member within said main body, the main body having an external surface on which is provided a location projection into which a holding member can be located to hold the  
20 internal member in the precursor casting, wherein the location projection has a first dimension transverse to said surface and a second dimension generally parallel to said surface, the first dimension being less than the second dimension.

25 The precursor casting may be formed of a suitable first removable material, for example a meltable material such as a wax. The internal member may be formed of a suitable second removable material, such as a ceramic material.

30 Preferably, the location projection has a first dimension transverse to said external surface, and has a second dimension generally parallel to said surface, the first dimension being less than the second dimension.

Desirably, the first dimension is in the range of  
35 0.2mm to 5mm, and preferably in the range of 0.3mm to 1mm. More preferably, the first dimension is substantially

0.4mm.

Desirably, the second dimension is in the range of 1mm to 30mm, and preferably in the range of 2mm to 10mm. More preferably, the second dimension is substantially 3mm.

5 In one embodiment, the location projection may be generally circular. In another embodiment, the location projection may be generally of an aerodynamic configuration.

Preferably, the precursor casting includes a plurality  
10 of said location projections, which may be arranged in pairs. The projections of each respective pair may be arranged generally opposite each other.

According to a further aspect of this invention, there is provided an investment moulding process for forming a  
15 cast member, the investment moulding process comprising providing a master mould, using the master mould to form a precursor casting from a removable material, the master mould having an internal surface defining a space in which said precursor casting can be formed, and said surface  
20 further defining a location indentation to provide a corresponding location projection on the precursor casting, into which a holding member can be inserted to hold an internal member.

Preferably, the location indentation has a first  
25 dimension transverse to said surface, and has a second dimension generally parallel to said surface, the first dimension being less than the second dimension.

Desirably, the first dimension is in the range of 0.2mm to 5mm, and preferably in the range of 0.3mm to 1mm.  
30 More preferably, the first dimension is substantially 0.4mm.

Desirably, the second dimension is in the range of 1mm to 30mm, and preferably in the range of 2mm to 10mm. More preferably, the second dimension is substantially 3mm.

35 Preferably, the location projection has a first dimension transverse to said surface and a second dimension

generally parallel to said surface, the first dimension being less than the first dimension.

Desirably, the first dimension is in the range of 0.2mm to 5mm, and preferably in the range of 0.3mm to 1mm.  
5 More preferably, the first dimension is substantially 0.4mm.

Desirably, the second dimension is in the range of 1mm to 30mm, and preferably in the range of 2mm to 10mm. More preferably, the second dimension is substantially 3mm.

10 The method may further include locating a holding member on the location projection, and thereafter inserting the holding member into the precursor casting to engage the internal member. Preferably, where the precursor casting is provided with a plurality of location projections, the  
15 method includes locating a respective holding member on each location projection and inserting each holding member into the precursor casting to engage the internal member.

Preferably, the method includes encasing the precursor casting in a second removable material to form an  
20 investment mould. The method may further include arranging the holding members such that they project outwardly from the precursor casting and are held in place by the further removable material.

The first removable material forming the precursor  
25 casting may be removed, for example by heating. Thereafter, a moulding material may be introduced into the investment mould, and allowed to cool. After said cooling, the investment mould may be removed. The investment mould may be formed of a ceramic material which may be removed by  
30 dissolving in a suitable leachant, for example an alkali, such as a solution comprising potassium hydroxide or sodium hydroxide.

An embodiment of the invention will now be described by way of example only, with reference to the accompanying  
35 drawings, in which:

Fig. 1A to 1H show schematically in cross section an

investment moulding process;

Fig. 2 is a close-up view of part of a precursor casting;

Fig. 3 is a close-up diagrammatic cross-sectional view  
5 of part of an investment mould; and

Fig. 4 is a close-up diagrammatic view of part of a final product.

Referring to Figs. 1A to 1H of the drawings, there is shown an investment moulding process, for use in the  
10 formation of turbine blades of a gas turbine engine. The moulding process involves several steps, the first step, as shown in Fig. 1A, being the provision of a master mould 10 formed of a suitable steel material for forming a precursor casting 12 (see Fig. 1B). The master mould 10 has an  
15 internal surface 16 which defines an internal three dimensional moulding space 14. In the embodiment shown, the space 14 defines two three dimensional patterns 15A, 15B for the production of two turbine blades, and which correspond to the shape of the blades. The surface 16 in  
20 each of the patterns 15A, 15B defines a plurality of location indentations 18 which form on the precursor casting 12 a plurality of location projections 20. The purpose of the location projections 20 is described below.

Each location indentation 18 has a first dimension A,  
25 e.g. its depth, generally perpendicular to the internal surface 16 of the patterns 15A, 15B and a second dimension B, e.g. its diameter, generally parallel to the surface 16. In the embodiment shown, the first dimension A is substantially 0.4mm and the second dimension B is  
30 substantially 3mm.

Each of the patterns 15A, 15B is provided with an internal member in the form of a ceramic core 17A, 17B, which provides in the final turbine blade a channel for the flow of cooling air.

35 A molten wax material is poured into the master mould 10 to fill it, as shown by the arrows A, and allowed to

set therein. After the wax material has set, the wax precursor casting 12 is removed from the master mould 10, and as shown in Fig 2 includes two wax precursor members 24A, 24B, each of which includes a portion which is the exact shape and size of the turbine blade to be formed. The precursor members 24A, 24B extend from a cross member 25 attached to an upstanding central shaft 27, the purpose of which is described below.

Each precursor member 24A, 24B comprises a main body 29A or 29B and one of the ceramic cores 17A, 17B. Each main body 29A or 29B includes a plurality of the location projections 20 on the outer surface 21 thereof. A pinning apparatus (not shown) is then provided to insert a plurality of holding members in the form of pins 22 into the wax precursor casting 12.

The pins 22 are formed of a platinum material, and are generally referred to as p-pins. Platinum is selected because it dissolves in the metallic alloy material used to form the turbine blades. Each of the pins 22 is located on the wax precursor casting 12 generally centrally of each respective location projection 20. The pins 22 are inserted through the wax material until each one engages the ceramic core 17A or 17B. As can be seen, the location projections 20 are provided in pairs along the length of each precursor member 24A, 24B.

The pins 22 are of such a length that after they have been inserted, their outer ends extend outwardly from the respective wax precursor member 24A, 24B for a reason that will be explained below.

Referring to Fig. 1C after the insertion of the pins 22, the precursor casting 12 is arranged in a vessel 26 and an investment mould 28 is then formed around the wax precursor casting 12. The investment mould 28 is formed of a ceramic material, and a slurry of the ceramic material is poured into the vessel 26 and allowed to set around the wax precursor casting 12. The ceramic material poured into

the vessel 26 is similar material to the material from which the ceramic cores 17A, 17B are formed.

When the ceramic material has set, it is heated and the wax then melts and, as shown by the arrows B in Fig 1D is poured out of the ceramic investment mould 28. After all the wax has been removed, the investment mould 28 defines investment moulding spaces 36A, 36B in place of the precursor members 24A, 24B. The location projections 20 in the wax precursor casting 12 provide corresponding second indentations 30 in the investment mould 28. The corresponding indentations 30 are of the same shape and size as the location projections 20. The ceramic material is formed around the end regions of the pins 22 to hold the pins 22 in place, thereby holding the ceramic cores 17A, 17B in their respective positions.

The part of the precursor casting 12 which formed the cross member 25 and the central shaft 27 now provides respectively a gallery 32 and a down conduit 34 for the flow of a metallic alloy material therethrough.

Referring to Fig 1E, as shown by the arrows C, molten metallic alloy material to form the turbine blades is then poured into the ceramic investment mould 28. Generally this is carried out by pouring the material into the down conduit 34, which is then distributed to the investment moulding spaces 36A, 36B by the gallery 32.

The molten metallic alloy material fills each one of the investment moulding spaces 36A, 36B, around each central ceramic core 17A, 17B. The molten material dissolves away each pin 22 and fills the spaces defined by the second indentations 30 and the outer ends of the pins 22, to form recrystallisation inhibiting projections 37 which correspond in shape, size and position to the and the outer ends of the pins 22.

Referring to Fig. 1F, the metallic alloy material is then allowed to crystallise and does so to form a single crystal. The shape of the projections 37 on the final

product, provided by the recrystallisation inhibiting indentations 30 in the investment mould 28 are of such shape that they inhibit recrystallisation of the material in that region, i.e. the alloy material forms only a single  
5 crystal as it solidifies.

Referring to Fig 1G, after the material has been allowed to cool and crystallise, the ceramic investment mould 28 is then removed, for example by dissolving it in a suitable leachant, such as an alkali. Two turbine blades  
10 38A, 38B are thus formed, which are mounted on a cross-member 40, from which an upstanding member 42 extends. The cross-member 40 and the upstanding member 42 are formed by the molten material which filled the gallery and the drawn conduit 34. Also on top of each blade 38A, 38B, there is a  
15 further member 44A, 44B. The blades 38A, 38B are removed from the cross-member 40 and the further members 44A, 44B are also removed. The blades 38A, 38B can then be finished to removed unwanted material to provide the final finished blade, one of which 38A is shown in Fig 1H. The leachant  
20 also dissolves the central cores 17A, 17B leaving in each blade 38A, 38B a conduit 46A, 46B for the passage of cooling air therethrough when the blade is in use.

Referring to Fig. 2, there is shown a cross-sectional side view of part of the wax precursor member 24A in the  
25 region of the location projections 20. As discussed above, the pins 22 are located on the respective location projection 20 and inserted into the main body 29A until one end of the pin 27 engages the ceramic core 17A. The outer end region of each pin 22 protrudes outwardly from the  
30 respective location projection 20 and will be held in place by the set ceramic material when the investment mould 28 is formed.

Each location projection 20 has a first dimension A generally perpendicular to the surface 21 of the precursor  
35 casting 12 and a second dimension B generally parallel to the surface 21 of the precursor casting 12. The dimensions

A and B are the same as they dimensions A and B of the location indentations 18.

Fig. 3 shows part of the investment mould 28 in the region formed by the part of the wax precursor member 24A shown in Fig. 2. The investment mould 28 comprises a main portion 50 which surrounds the moulding space 36A (and the moulding space 36B as well as the gallery 32 and the down conduit 34, but these are not shown in Fig. 3). The pins 22, which are located at the second indentations 30, hold the ceramic core 17A in place, and the pins 22 are in turn held in place by the ceramic material of the main portion 50. The second indentations 30 have first and second dimensions which are the same as the first and second dimensions A and B of the location indentations 18 and the location projection 20.

Referring to Fig. 4, there is shown a cross-sectional side view of part of one of the turbine blades 38A in the region formed by the part of the investment mould shown in Fig. 3. The blade 38a is shown prior to finishing to remove unwanted material. As can be seen the recrystallisation inhibiting projections 37 in the form of a disc shaped member which corresponds to the second indentation 30 in the investment mould 28. An elongate extension 54 extends from the projection 37 and 54 which corresponds to the outer end region of the pin, 22 which has been dissolved by the molten alloy material.

Before the blade 38 can be used, it will be desirable to remove either just the elongate extension 54, or the recrystallisation inhibiting projection 37 in addition to the elongate extension 54. This can be done by any suitable means know in the art.

The dimensions are also possessed by the location projection 20 in the wax precursor 12, by the recrystallisation inhibiting indentations 30 in the investment mould 28 and by the recrystallisation projections 37 in the blades 37A, 38A.

The main part 52 of the projection 37 has been described above as being a disc shaped member. It will be appreciated, however, that the main part 52 of the projections 37 could be any other suitable shape and, on one embodiment, the projection can be of an aerodynamic shape which may assist with the passage of air across the surface of the blade.

There is thus described an apparatus for forming turbine blades of a gas turbine engine in the preferred embodiment, and which obviates the prior art problems associated with having to form pyramidal formations on the wax precursor casting after it has been formed. There is also described a method for producing such turbine blades which is generally more efficient and more economical than prior art methods.

Various modifications can be made without departing from the scope of the invention. For example, in the above description, we have referred to the final product as being a turbine blade. It will be appreciated that, however, the invention can be used to form other articles in which it is necessary to provide a central passage, and which are generally formed by investment casting. An example of such a product is a compressor blade for a gas turbine engine. Also, the above description relates only to the formation of two turbine blades, but it will be appreciated that any desired number of turbine blades, or compressor blades or any other suitable article can be formed using the above desired process.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

**Claims:-**

1. A master mould (10) for forming a precursor casting (12) of a cast member in an investment moulding process, 5 the master mould (10) having an internal surface (16) defining a space (14) in which said precursor casting (12) can be formed, characterised in that said surface further defines a location indentation (18) to provide a location projection (20) on the precursor casting (12) into which a 10 holding member (22) can be inserted to engage an internal member (17A, 17B).
2. A master mould according to claim 1 characterised in that the precursor casting (12) is formed of a first removable material and the internal member (17A, 17B) is 15 formed of a removable material.
3. A master mould according to claim 1 or 2 characterised in that the location indentation (18) has a first dimension transverse to said surface (16), and has a second dimension generally parallel to surface (16), the first dimension 20 being less than the second dimension.
4. A master mould according to claim 3 characterised in that the ratio of the first dimension to the second dimension is in the range of 1:5 to 1:10.
5. A master mould according to claim 4 wherein the ratio 25 of the first dimension to the second dimension is in the range of 1:6 to 1:10.
6. A master mould according to claim 5 characterised in that the ratio of the first dimension to the second dimension is substantially 1:7.5.
- 30 7. A master mould according to any preceding claim characterised in that the location indentation (18) is generally circular.
8. A master mould according to any of claims 1 to 6 characterised in that the location indentation (18) has a 35 generally aerodynamic configuration.
9. A master mould according to any preceding claim

characterised in that the master mould (10) defines a plurality of said location indentations (18) arranged in pairs, the indentations of each respective pair being arranged generally opposite each other.

- 5 10. A precursor casting (12) of a cast member to be formed during an investment moulding process, the precursor casting having the configuration of the cast member the precursor casting (12) comprising a main body (29A, 24B) and an internal member (17A, 17B) within said main body,
- 10 the main body (29A, 29B) having an external surface characterised in that a location projection (20) is provided on the external surface into which a holding member (22) can be located to engage the internal member (17A, 17B) in the precursor casting (12), wherein the
- 15 location projection (20) has a first dimension transverse to said surface and a second dimension generally parallel to said surface, the first dimension being less than the second dimension.
11. A precursor casting according to claim 10
- 20 characterised in that the ratio of the first dimension to the second dimension is in the range of 1:5 to 1:10.
12. A precursor casting according to claim 11 characterised in that the ratio of the first dimension to the second dimension is in the range of 1:6 to 1:10.
- 25 13. A precursor casting according to claim 12 characterised in that the ratio of the first dimension to the second dimension is in substantially 1:7.5.
14. A precursor casting according to any of claims 10 to 13 characterised by being formed of a suitable first
- 30 removable material.
15. A precursor casting according to any of claims 10 to 14 characterised in that the internal member (17A, 17B) is formed of a second removable material.
16. A precursor casting according to any of claims 10 to
- 35 15 characterised in that the location projection (20) is generally circular.

17. A precursor casting according to any of claims 10 to 15 characterised in that the location projection (20) is generally of an aerodynamic configuration.
18. A precursor casting according to any of claims 10 to 5 17 characterised in that the precursor casting (12) includes a plurality of said location projections (20) arranged in pairs, generally opposite each other.
19. An investment moulding process for forming a cast member, the investment moulding process comprising 10 providing a master mould (10) using the master mould to form a precursor casting (12) from a first removable material, the master mould having an internal surface (16) defining a space (14) in which said precursor casting (12) can be formed, characterised in that said surface defines a 15 location indentation (18) to provide a corresponding location projection (20) on the precursor casting, into which a holding member (22) can be located to engage an internal member (17A, 17B) in the precursor casting (12).
20. An investment moulding process according to claim 19 20 characterised in that the location indentation (18) has a first dimension transverse to said surface (16), and has a second dimension generally parallel to said surface (16), the first dimension being less than the second dimension.
21. An investment moulding process according to claims 19, 25 20 or 21 characterised in that the location projection (20) has a first dimension transverse to said surface of the precursor casting (12) and a second dimension generally parallel to said surface of the precursor casting (12), the first dimension being less than the first dimension.
- 30 22. An investment moulding process according to claim 19, 20 or 21 characterised in that the method further includes locating a holding member (22) on the location projection (20), and thereafter inserting the holding member (22) into the precursor casting (12) to engage the internal member 35 (17A, 17B).
23. An investment moulding process according to any of

claims 19 to 22 characterised in that the precursor casting (12) is provided with a plurality of location projections (20), and the method further includes locating a respective holding member (22) on each location projection and  
5 inserting each holding member into the precursor casting to engage the internal member.

24. An investment moulding process according to any of claims 23 or 24 characterised in that the method includes encasing the precursor casting (12) in a second removable  
10 material to form an investment mould (28), wherein the step of inserting the or each holding member (22) includes arranging the or each holding member to project outwardly from the precursor casting (12) held in place by the second removable materials.

15 25. A master mould substantially as herein described with reference to the accompanying drawings.

26. A precursor casting substantially as herein described with reference to the accompanying drawings.







27. An investment moulding process substantially as herein  
20 described with reference to the accompanying drawing.

28. Any novel subject matter or combination including novel subject matter disclosed herein, whether or not within the scope of or relating to the same invention as any of the preceding claims.

**Abstract****Investment Moulding Process and Apparatus (Figs. 1A to 1H)**

5

An investment mould process for forming a cast member is described. The process comprises forming a precursor casting (12) from a master mould (10). The master mould (10) has an internal surface (16) defining a space (14) in  
10 which the precursor casting (12) can be formed. The surface (16) defines a location indentation (20) to provide a corresponding location projection (3) on the precursor casting (12). A holding member (22) can be inserted into the location projection (3) to hold an internal member  
15 (17A, 17B).

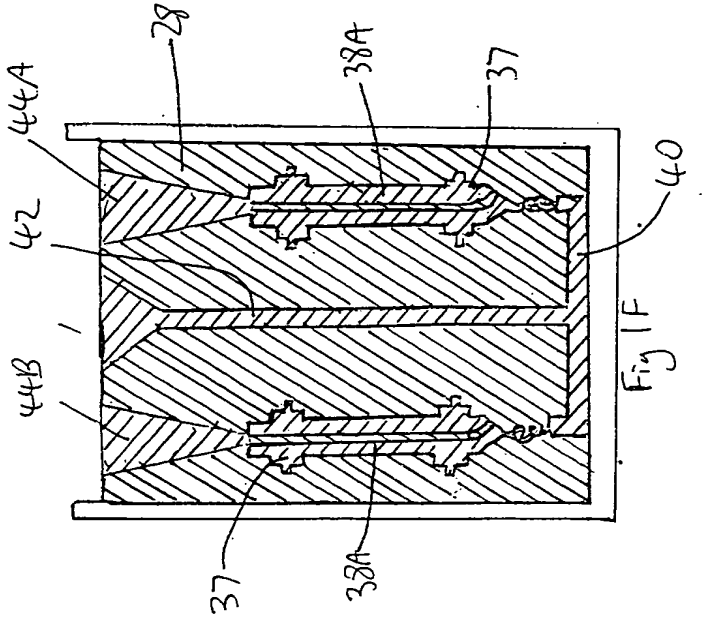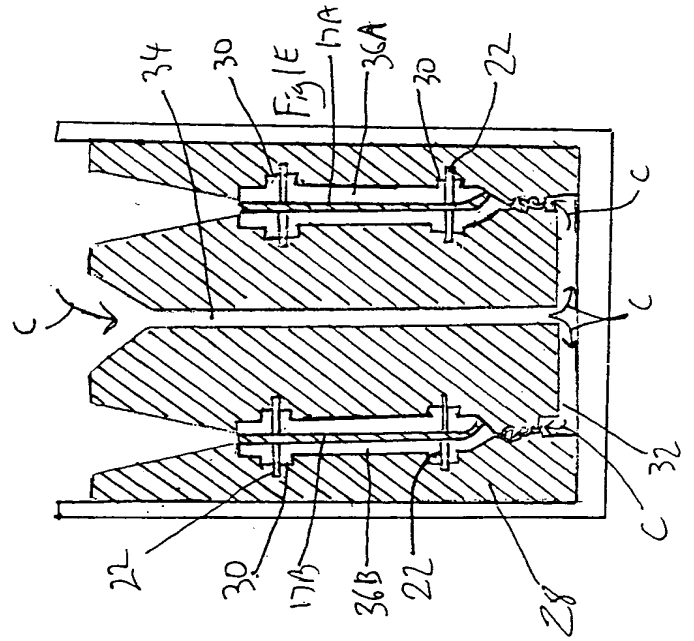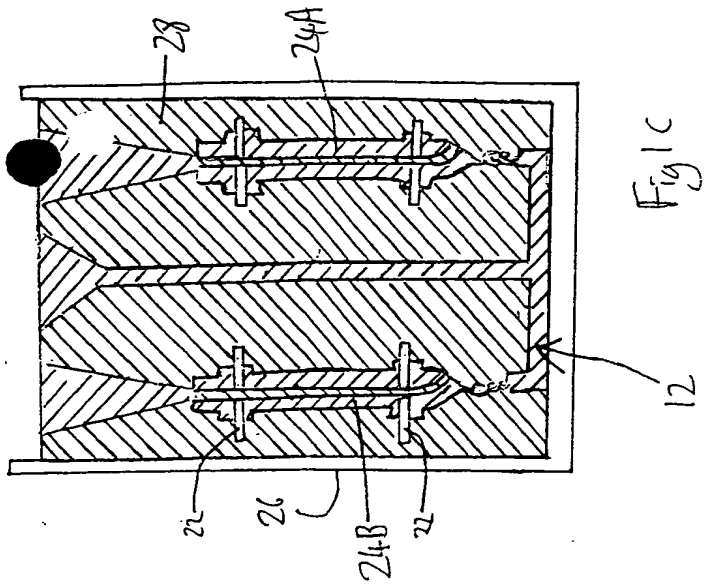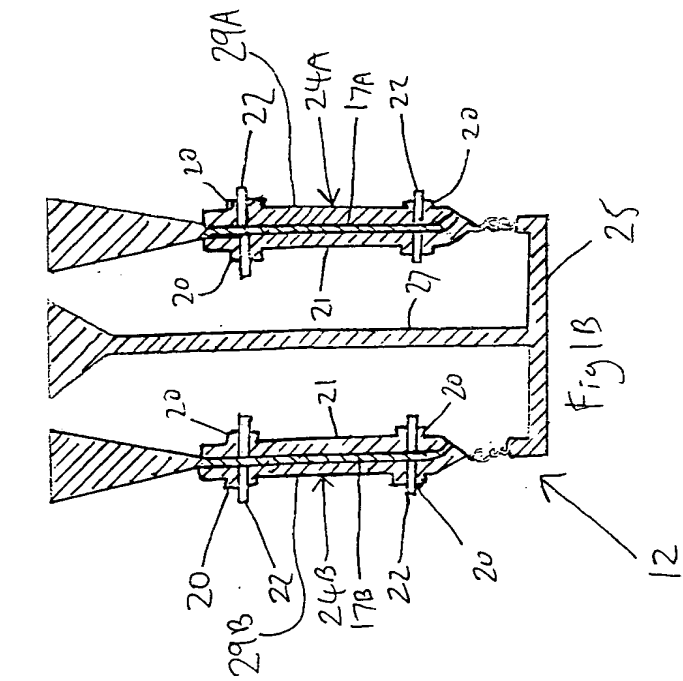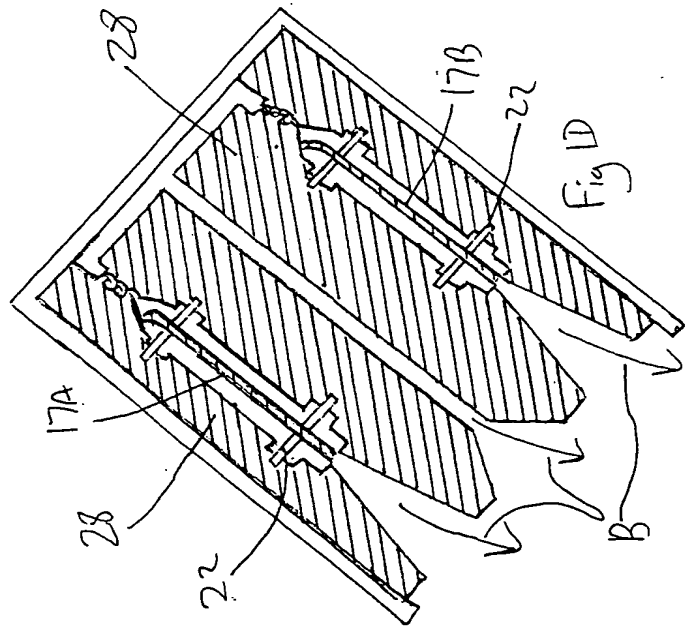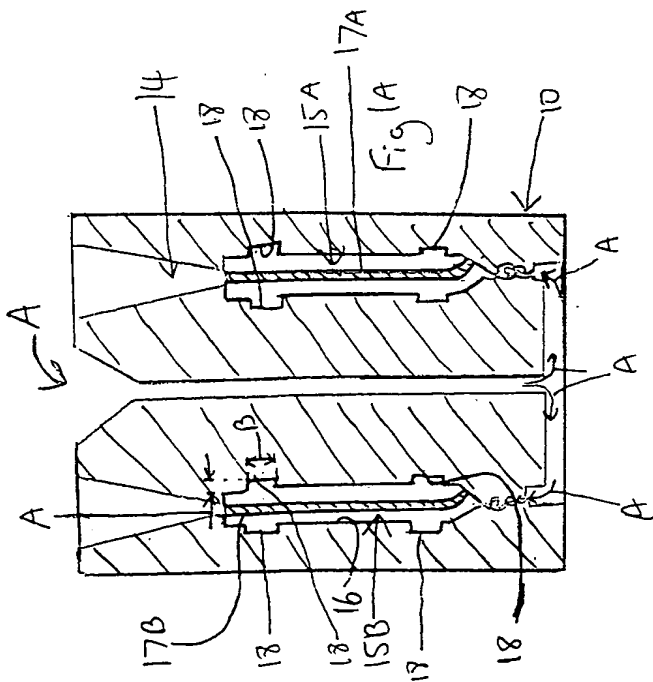


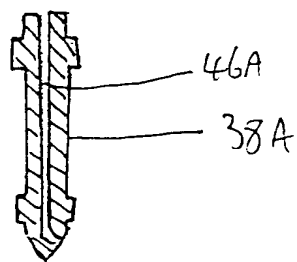


Fig 1H

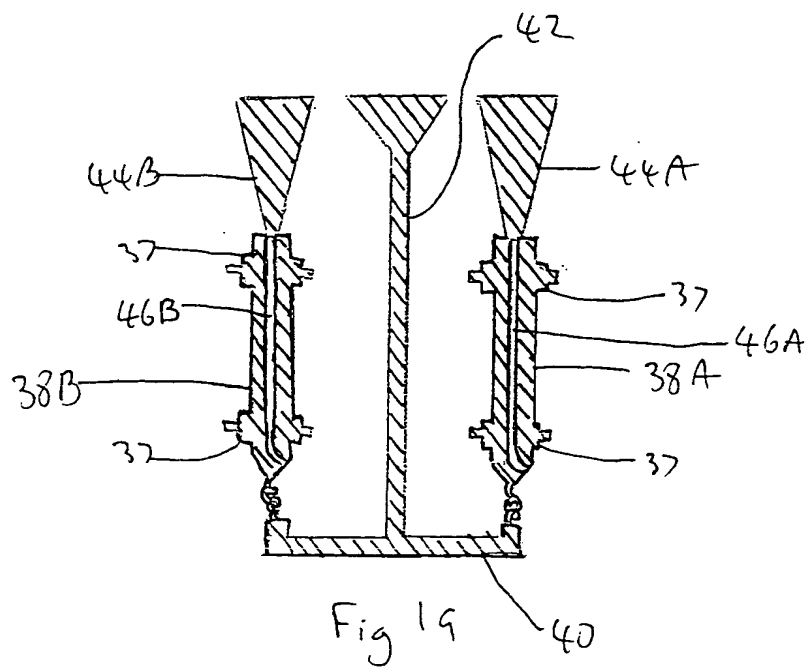